



# HID LED HID Replacement Wallpack Lamp

## HIGHLIGHTS

- Designed to replace HID wallpack lamps with efficient LED technology
- Can be installed in both vertical and horizontal applications
- FieldCCeT (CCT Selectable) and PowerSet (Power Selectable): allows for multiple “set and forget” color options
- Shatter resistant for reduced risk of injury or breakage
- Integral driver; eliminates the need for external driver or ballast
- Built-in 4kV surge protection
- Rotatable base provides precision aiming
- 180° Beam Angle
- 350° Tilt
- Environmentally friendly: contains no glass, or mercury

## CERTIFICATIONS

- cULus Listed for dry and damp locations
- DesignLights Consortium® Qualified - meets DLC requirements for efficacy and lumen maintenance
- RoHS Compliant
- FCC

## PERFORMANCE

- FieldCCeT: 3000K / 4000K / 5000K CCT
- All lamps ship at the highest wattage setting and at 5000K CCT
- PowerSet: Up to 60/40/20W
- CRI >80
- Rated lifetime: L70: >50,000 hours

## ELECTRICAL

- Input voltage: 120-277VAC (50/60 Hz)
- Power Factor: >0.9
- THD: <20%
- 40W and 60W models include overheating protection feature
- Surge Protection: 4kV

## THERMAL

- -22°F to 113°F (-30°C to 45°C) operating temperature\*

## CONSTRUCTION

- Aluminum heatsink
- Impact resistance Polycarbonate lens and housing
- Lamp support provided for 30W, 40W and 60W models

## WARRANTY


- 5-Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

\*Not recommended for air-tight fixtures

project name	type
catalog number	voltage
approved by	date



## KEY FEATURES

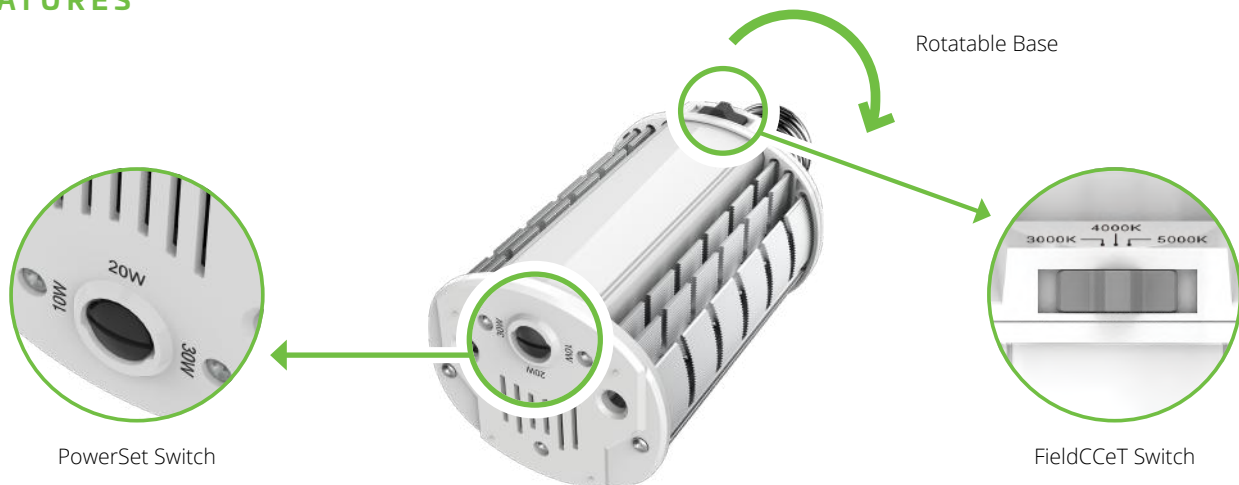


## PERFORMANCE SUMMARY


ORDER CODE	ITEM #	SELECTABLE WATTAGE*	LUMENS	EFFICACY (lm/W)	VOLTAGE	SELECTABLE CCT*	TRADITIONAL HID WATTAGE EQUIVALENT	DLC ID #
<b>E26</b>								
12728	LPS20WP/8FCCT/E26	20/10/5W	3000/1500/750 lm	144-160 lm/W	120-277V	30/40/5000K	100W HPS/MH	N/A
12730	LPS30WP/8FCCT/E26	30/20/10W	4500/3000/1500 lm	146-161 lm/W	120-277V	30/40/5000K	125W HPS/MH	N/A
12732	LPS40WP/8FCCT/E26	40/30/20W	6000/4500/3000 lm	146-158 lm/W	120-277V	30/40/5000K	200W HPS/MH	N/A
12734	LPS60WP/8FCCT/E26	60/40/20W	9000/6000/3000 lm	145-162 lm/W	120-277V	30/40/5000K	250W HPS/MH	N/A
<b>EX39</b>								
12729	LPS20WP/8FCCT/EX39	20/10/5W	3000/1500/750 lm	144-160 lm/W	120-277V	30/40/5000K	100W HPS/MH	S-NL4B8O
12731	LPS30WP/8FCCT/EX39	30/20/10W	4500/3000/1500 lm	146-161 lm/W	120-277V	30/40/5000K	125W HPS/MH	S-Q7MX46
12733	LPS40WP/8FCCT/EX39	40/30/20W	6000/4500/3000 lm	146-158 lm/W	120-277V	30/40/5000K	200W HPS/MH	S-LUK46T
12735	LPS60WP/8FCCT/EX39	60/40/20W	9000/6000/3000 lm	145-162 lm/W	120-277V	30/40/5000K	250W HPS/MH	S-CMGTXW

\*All lamps ship at the highest wattage setting and at 5000K CCT


## PRODUCT DIMENSIONS

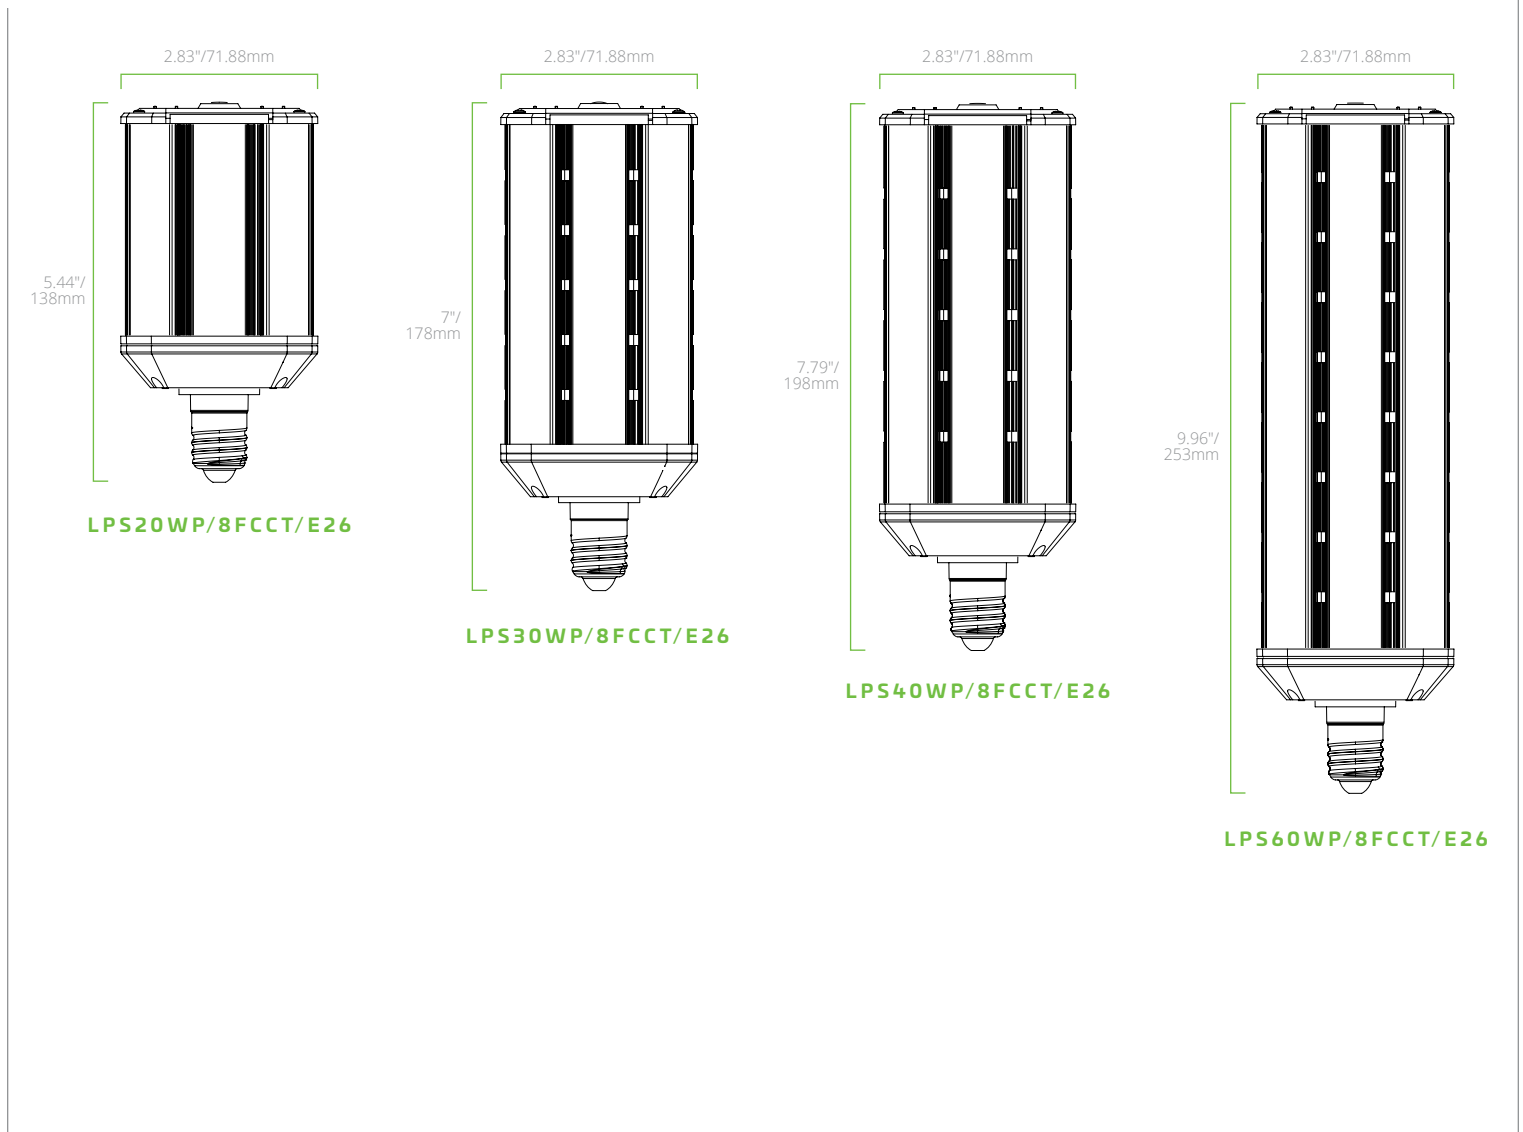


# PRODUCT DIMENSIONS

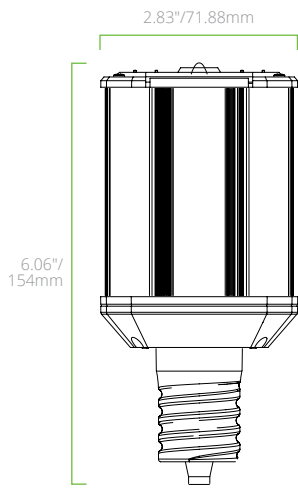


LPS20WP/8FCCT/EX39

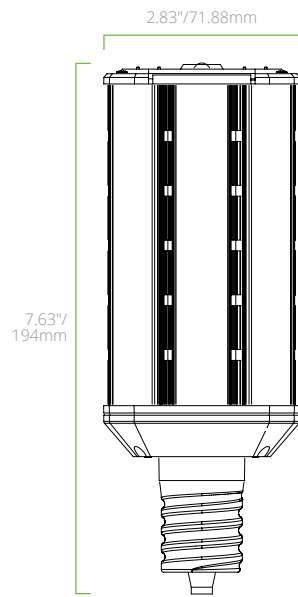

LPS30WP/8FCCT/EX39

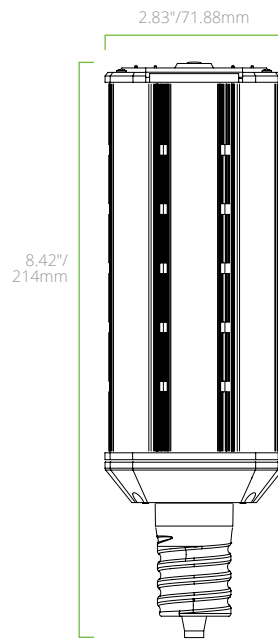

LPS40WP/8FCCT/EX39

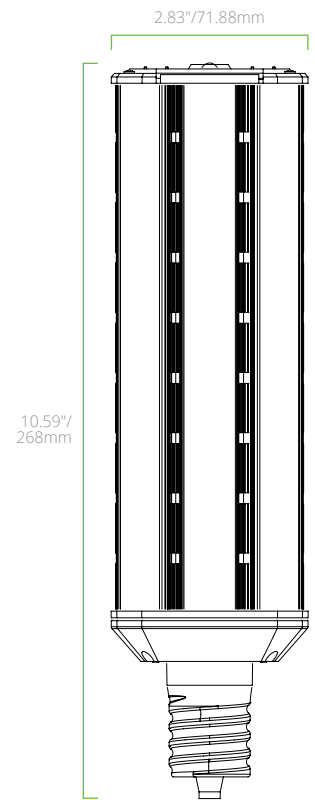

LPS60WP/8FCCT/EX39