





EASY 5 COLORS  
**SELECCTOR**  
2700K • 3000K • 3500K • 4000K • 5000K



**NEW**  
**ADJUSTABLE**  
DESIGN

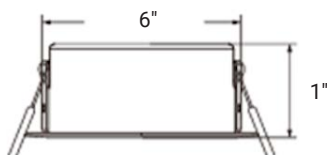

#### FEATURES

6" round multi-CCT LED "Adjustable Downlight" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 5-Color SeleCCTor switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.

LUMENS	800
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Round Adjustable
TRIM COLORS	WH (White)
DIMMING	DIMTR (Triac)
EMERGENCY	16W high voltage inverter (remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
800	807	15W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

#### INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3".

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

- IC-rated and Air-Tight ready and may be in direct contact with insulation.
- Can be installed in shallow plenum spaces.
- May be installed in drywall or suspended ceilings.
- Flicker-free 120V forward-phase dimming down to 5%.
- Even illumination achieved with patent-pending optics and edge-lit LED technology.
- Ideal where ceiling or top access is unavailable.

## TRIM



EXAMPLE:

**RPL664-800L-DIMTR-120-27K/30K/35K/40K/50K-90-WH**

TYPE	LUMEN	CCT	CRI	FINISH
RPL664	800L-DIMTR-120	27K/30K/35K/40K/50K	90+	WH - White

## ACCESSORIES




**RL-ACC-SLIM-1-10F**  
10-ft long extension





**RL-ACC-SLIM-1-20F**  
20-ft long extension



**RL-UNV-4/5/6**  
For use with: 4", 5", 6"  
Universal mounting plate

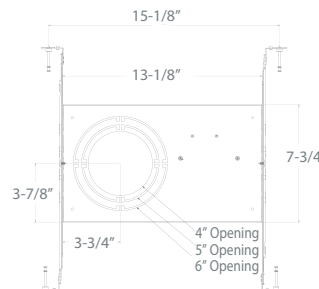

**AL-ACC-SLIM-6-F-ROUGHPLATE**  
For use with: 6" downlights

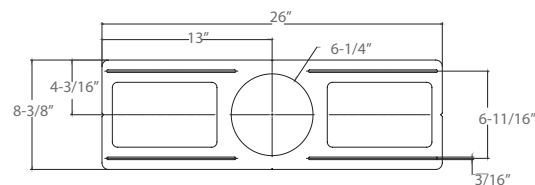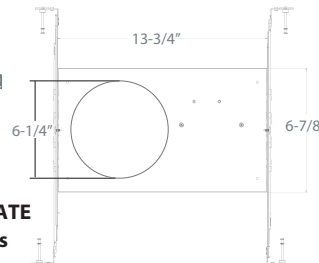

**RL-ACC-SLIM-6-ROUGHPLATE**  
Rough-in plate for use with 6" downlights

## RL-ACC-SLIM-1-10F

### OPTIONS

- ☐ RL-ACC-SLIM-1-10F - 10ft Long Extension
- ☐ RL-ACC-SLIM-1-20F - 20ft Long Extension
- ☐ RL-UNV-4/5/6 - Universal Mounting Plate for 4", 5" and 6"
- ☐ RL-ACC-SLIM-6-F-ROUGHPLATE - 6" Mounting Plate
- ☐ AL-ACC-SLIM-6-F-ROUGHPLATE - 6" Flanged Roughplate